

# ALARUM

by

Hoa Nguyen, Hien Nguyen, Brandon Nwankwo

Submitted to  
The Faculty of the School of Information Technology  
in Partial Fulfillment of the Requirements for  
the Degree of Bachelor of Science  
in Information Technology

© Copyright 2019 Hoa Nguyen, Hien Nguyen, Brandon Nwankwo

The author grants to the School of Information Technology permission  
to reproduce and distribute copies of this document in whole or in part.

\_\_\_\_ Hoa Nguyen \_\_\_\_\_ April 30th, 2019 \_\_\_\_\_  
Hoa Nguyen Date

\_\_\_\_ Hien Nguyen \_\_\_\_\_ April 30th, 2019 \_\_\_\_\_  
Hien Nguyen Date

\_\_\_\_ Brandon Nwankwo \_\_\_\_\_ April 30th, 2019 \_\_\_\_\_  
Brandon Nwankwo Date

\_\_\_\_ Tyler Hopperton \_\_\_\_\_ April 30th, 2019 \_\_\_\_\_  
Tyler Hopperton, Faculty Advisor Date

University of Cincinnati  
College of  
Education, Criminal Justice, and Human Services  
March 2019



Prepared by:  
Hoa Nguyen, Hien Nguyen, Brandon Nwankwo

Students of  
University of Cincinnati  
College of Education, Criminal Justice, and Human Services  
School of Information Technology

April 11, 2019

# TABLE OF CONTENTS

<b>TABLE OF CONTENTS</b>	i
<b>LIST OF ILLUSTRATIONS</b>	iii
Tables	iii
Figures	iii
<b>ACRONYMS AND ABBREVIATIONS</b>	iii
<b>ABSTRACT</b>	1
<b>PROBLEM STATEMENT</b>	2
Introduction	2
Problem	2
Solution	2
Project Description	2
User Profile	3
<b>PROJECT MANAGEMENT</b>	5
Budget	5
Objective/Deliverables	6
Project Schedule	7
<b>TECHNICAL ELEMENT</b>	10
Application	10
Programming	10
SMTP Service	11
Security	12
<b>TESTING</b>	13
Overview	13
Scope	13
Objective	13
Entry and Exit Criteria	13
Logging Test and Reporting	14
System Testing	14
Testing Procedures	14
Pass/Fails Conditions	15

Schedule of Team Member Testing	15
Schedule of Round Table Testing	15
<b>IT EXPO</b>	16
<b>CONCLUSION</b>	17
WORK CITED	18
APPENDIX	19
Testing Reports	19

# LIST OF ILLUSTRATIONS

## TABLES

No.

Table 1.	Project Budget .....	5
Table 2.	Team Member Testing .....	15
Table 3.	Round Table Testing .....	15
Table 4.	Stability Test .....	19
Table 5.	Launch Test .....	20
Table 6.	Functionality Test .....	21

## FIGURES

No.

Figure 1.	User Profile.....	3
Figure 2.	Use Case Diagram.....	4
Figure 3.	Course Deliverable.....	7
Figure 4.	Fall Semester 2018 Gantt Chart.....	7, 8
Figure 5.	Spring Semester 2019 Gantt Chart.....	9
Figure 6.	IT Expo Poster.....	16

# ACRONYMS AND ABBREVIATIONS

IoT                      Internet of Things

## **ABSTRACT**

Alarum is an Internet of Things (IoT) device that helps convenience stores know when to restock the cans/bottles in their beverage fridges. With an ESP8266 microcontroller and Adafruit VL53LOX laser sensor, Alarum will alert the user the current status of a bottle organizer rack using the laser sensor; which is located at the end of the bottle organizer and constantly calculating the distance between the last item and the sensor. Next, the ESP8266 will send notifications via alert emails containing the current status of the bottle organizer in the fridge, and users can also dictate how frequently they receive them. This process can be further simplified by connecting the notification email with the party responsible for fulfilling orders. Alarum project will be a solution to an inventory management problem of the food retail industry.

# PROBLEM STATEMENT

## Introduction

In today's world, technological advance has made a huge impact on human life in a lot of different aspects. The "Internet of Things" (IoT) has been one of the hottest topics in the technology world for the past couple of years. All of these devices that have an on/off switch will help connect people-people, people-device, and device-device in a giant network of connected "things". With this being said, "anything that can be connected, will be connected". Imagine if your office equipment knew when it was running low on supplies and automatically re-ordered more. This new technology advance will add a level of digital intelligence to devices and allow them to communicate, analyze, and create an action to help someone with a particular task.

## Problem

What if supermarkets and convenience stores have a device that could help alert the store when to restock their beverage fridges as soon as they are about to run out of stock?

## Solution

An IoT device that will help convenience stores know when to restock their cans/bottles in their beverage fridges. This project will be a huge addition function for the future food retail industry.

## Project Description

Alarum is an IoT device that uses ESP8266 Thing (Wifi-enabled microcontroller) and Adafruit VL53LOX (proximity distance sensor), which will be located at the end of the beverage rack. Alarum can detect and measure the distance between the last item in the rack and the sensor, then it will alert the users of the current status of the rack. Whenever the laser sensor detects a distance that is registered at "Low on stock," it will be read by the ESP8266 with an already set logic that simultaneously connects it with the laser sensor. Following, the ESP8266 will send a notification via an alert email to the user, so that they will in turn know which rack in the fridge is low on stock. This process can be further simplified by connecting the notification email with the party responsible for fulfilling orders. This device will be a huge addition to the inventory management process in the food retail industry.

## User Profile


Figure 1: User Profile, illustrates the user profile for the Alarum project.

<b>PROJECT:</b> Alarum
<b>POTENTIAL USERS:</b> - Food Retail Industry (Supermarket, Convenience store)
<b>SOFTWARE, INTERFACE, AND RELATED EXPERIENCE:</b> - This project primary target to the food retail industry or any individual convenience store. The only experience that Alarum's users need to be familiar with is using email on most of the basic technology platforms like mobile device, desktop, laptop.
<b>EXPERIENCE WITH SIMILAR APPLICATIONS:</b> - There is no other application that I think would share similar experience with the sensor robot that we are creating. Users mostly need to have some experience with email.
<b>TASK EXPERIENCE:</b> - Alarum will be setting up at the end of the beverage rack and it will detect and measure the distance between the last item and the sensor so that it can alert the user when the rack is low on stock. Then Alarum will convert a signal and automatically sending an email to the user for an immediately response.
<b>FREQUENCY OF USE:</b> - It can be use whenever user's store beverage organizers ran out of stock. This occurrence can be daily, weekly, monthly.
<b>KEY PROJECT DESIGN REQUIREMENTS THAT THE PROFILE SUGGESTS:</b> - Faster Response for food retail industry - Easy Set up/ Usage

Figure 1: User Profile

## Use Case Diagram

Figure 2 is the Use Case Diagram for Alarum.

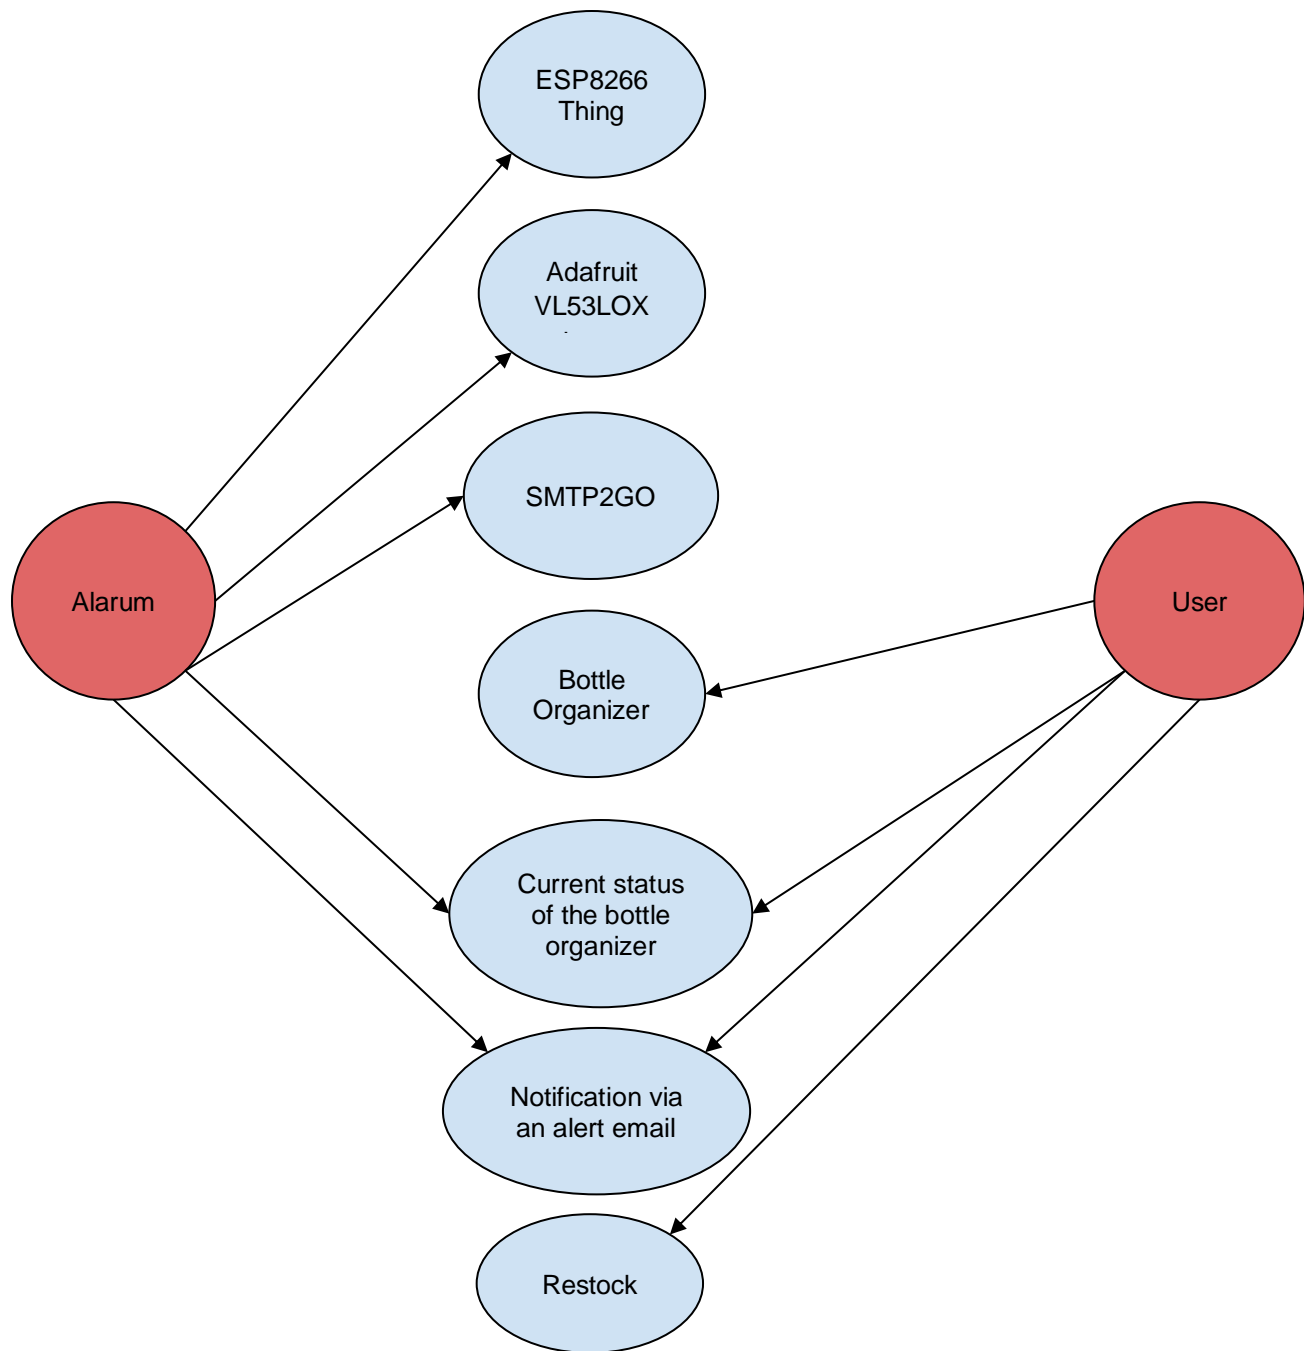

**Figure 2: Use Case Diagram**

# PROJECT MANAGEMENT

## Budget

Table 1: Project Budget outlines the budget for this project. This budget reveals the real-world cost of the project for a year in development. We will be utilizing the UC Innovation Hub 1819 building for meetings, as well as using their tools to work on our project so that the budget for our labor will be at no cost. This budget table below will be split into two categories:

Hardware and Software.

CATEGORY	ITEM	ACTUAL COST
Software	Arduino IDE	\$0
	SMT2GO	\$0
Hardware	Honbay 40pcs Male/Female Pin Header	\$7.99
	Iron Solder Wire	\$7.90
	Cylewet 10Pcs 3.3V-5V 4 Channels Logic Level Converter	\$10.99
	Cyclot 55 Mini Solderless BreadBoard (Pack of 7)	\$8.59
	Elegoo EL-CP-004 120pcs Dupont Wire	\$6.98
	Elegoo 6pcs Mini Breadboard	\$7.86
	Adafruit VL53L0X	\$26.62
	SparkFun ESP8266 Thing	\$22.85
	Trueflex Bottle Organizer	\$56.60
<b>TOTALS</b>		<b>\$156.40</b>

**Table 1: Project Budget**

## Objective/Deliverables

Alarum is an Internet of Things device that could alert any store when their beverages are low on stock, which will help the store with ordering and restocking their beverages. The sensor robot will be located at the end of each rack in the fridge to detect the distance between the sensor and the last item on the rack.


The goals for Alarum is to have a completed prototype of the sensor and the microcontroller, which includes an electronics breadboard that is connecting with the ESP8266, and Adafruit VL53LOX laser sensor. This sensor device can then be tested with the bottle organizer and a dummy item on it for its functionalities. The end goal is to have the device send alerts via emails to the user with the most updated status of the bottle organizer and also a blinking LED as a notifier for the users in the case of when the rack is out of stock, the LED will stop blinking whenever there are items back on the rack.

### *Alarum Objectives:*

- Connect the ESP8266 with VL53LOX sensor
- Connecting the ESP8266 with the laser sensor so it could receive data from the sensor.
- VL53LOX sensor is able to detect the distance of items on the rack.
- Connect ESP8266 with the Wifi.
- With Wifi connection, ESP8266 can send the alert notifications to the user (store manager) via emails.
- Develop code for the ESP8266 to send an email whenever a “marked distance” is being read from the sensor.

### *Base Cases:*


- In case no object is in front of sensor. How it is going to notify the store manager.
- What if a customer picks the items and sensor detects the threshold, but customer put that item back. How a system going to respond?

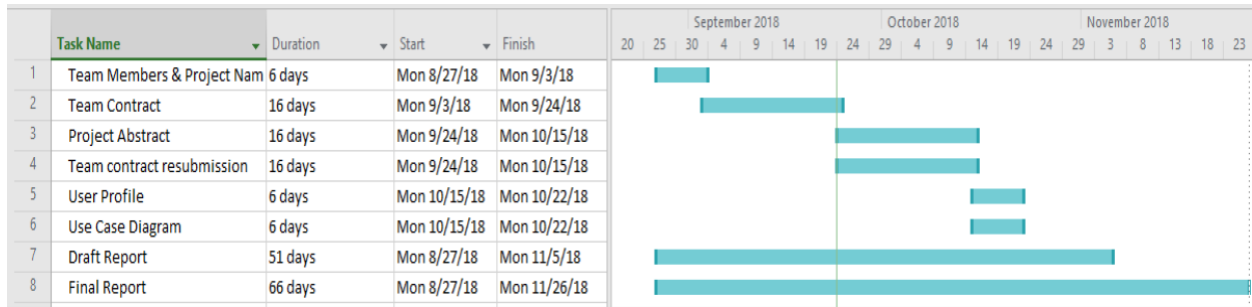


**Figure 3: Course Deliverable**

## Project Schedule


**Figure 4: Fall 2018 Project Schedule and Gantt Chart** is our Fall project schedule with the major milestones listed.

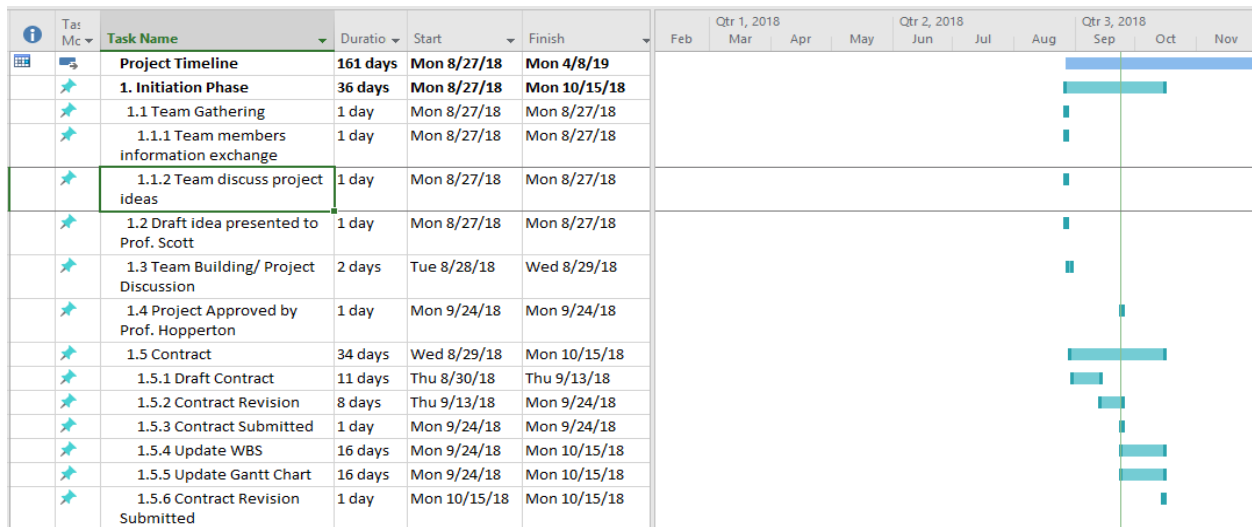

★	<b>2. Research Phase</b>	<b>15 days</b>	<b>Wed 8/29/18</b>	<b>Tue 9/18/18</b>
★	2.1 Listing the require hardware and software	1 day	Wed 8/29/18	Wed 8/29/18
★	2.2 How to set up an Andruino project using an electronics breadboard	3 days	Thu 8/30/18	Mon 9/3/18
★	2.3 How to connect the Andruino with the sensor	4 days	Tue 9/4/18	Fri 9/7/18
★	2.4 How to pair the Arduino with the WifiShield	4 days	Sat 9/8/18	Wed 9/12/18
★	2.5 How to connect to the wifi with security implementation	3 days	Wed 9/12/18	Fri 9/14/18
★	2.6 How to send out notifications via emails from the Arduino	3 days	Fri 9/14/18	Tue 9/18/18
★	<b>3. Design Phase</b>	<b>10 days</b>	<b>Wed 9/19/18</b>	<b>Tue 10/2/18</b>
★	3.1 Rack prototype Functionality	5 days	Wed 9/19/18	Tue 9/25/18
★	3.2 Robot prototype Orientation	5 days	Wed 9/26/18	Tue 10/2/18
★	<b>4. Implementation Phase</b>	<b>34 days</b>	<b>Tue 10/2/18</b>	<b>Fri 11/16/18</b>
★	4.1 Purchase equipments for the prototype	7 days	Tue 10/2/18	Wed 10/10/18
★	4.2 Set up the Arduino project using an electronics breadboard	7 days	Thu 10/11/18	Fri 10/19/18
★	4.3 Connect the Arduino with the sensor	5 days	Sat 10/20/18	Thu 10/25/18
★	4.4 Pair the Arduino with the WifiShield	5 days	Fri 10/26/18	Thu 11/1/18
★	4.5 Connect to the wifi with security implementation	5 days	Fri 11/2/18	Thu 11/8/18
★	4.6 Send out email from the Arduino using wifi	6 days	Fri 11/9/18	Fri 11/16/18
★	<b>5. Test Phase</b>	<b>8 days</b>	<b>Fri 11/16/18</b>	<b>Tue 11/27/18</b>
★	5.1 Sensor Functionality	2 days	Fri 11/16/18	Mon 11/19/18
★	5.2 Arduino Functionality	2 days	Tue 11/20/18	Wed 11/21/18
★	5.3 Wifi connectivity	2 days	Thu 11/22/18	Fri 11/23/18
★	5.4 Send out email to the users	3 days	Sat 11/24/18	Tue 11/27/18
★	<b>6. Deployment Phase</b>	<b>8 days</b>	<b>Tue 11/27/18</b>	<b>Thu 12/6/18</b>
★	6.1 Install product prototype	4 days	Tue 11/27/18	Fri 11/30/18
★	6.2 Test/Validate the prototype	5 days	Sat 12/1/18	Thu 12/6/18
★	<b>7. Documentation Phase</b>	<b>21 days</b>	<b>Mon 9/24/18</b>	<b>Mon 10/22/18</b>
★	7.1 Abstract and Team Contract Submission	16 days	Mon 9/24/18	Mon 10/15/18
★	7.2 User Profile Submission	21 days	Mon 9/24/18	Mon 10/22/18
★	7.3 Use Case Submission	21 days	Mon 9/24/18	Mon 10/22/18
★	7.4 Weekly reports	21 days	Mon 9/24/18	Mon 10/22/18
★	7.5 Project Timeline Updated	21 days	Mon 9/24/18	Mon 10/22/18
★	<b>8. Demonstration of Deliverables</b>	<b>141 days</b>	<b>Mon 9/24/18</b>	<b>Mon 4/8/19</b>
★	8.1 Elevator Speech	11 days	Mon 10/15/18	Mon 10/29/18
★	8.2 Presentation	8 days	Thu 11/22/18	Mon 12/3/18
★	8.3 Final reports	1 day	Mon 11/26/18	Mon 11/26/18
★	8.4 Tech Expo	1 day	Tue 4/9/19	Tue 4/9/19

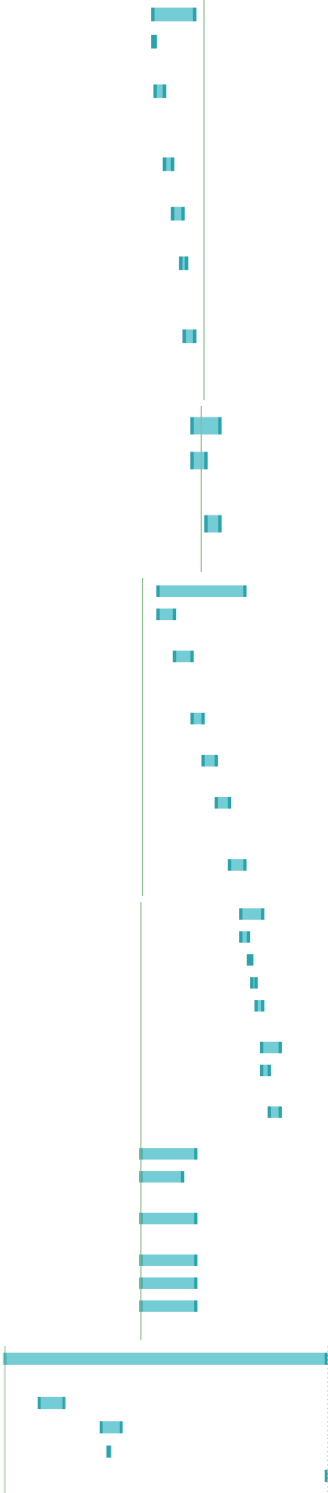

**Figure 5: Spring 2019 Project Schedule and Gantt Chart** is our Fall project schedule with the major milestones listed.

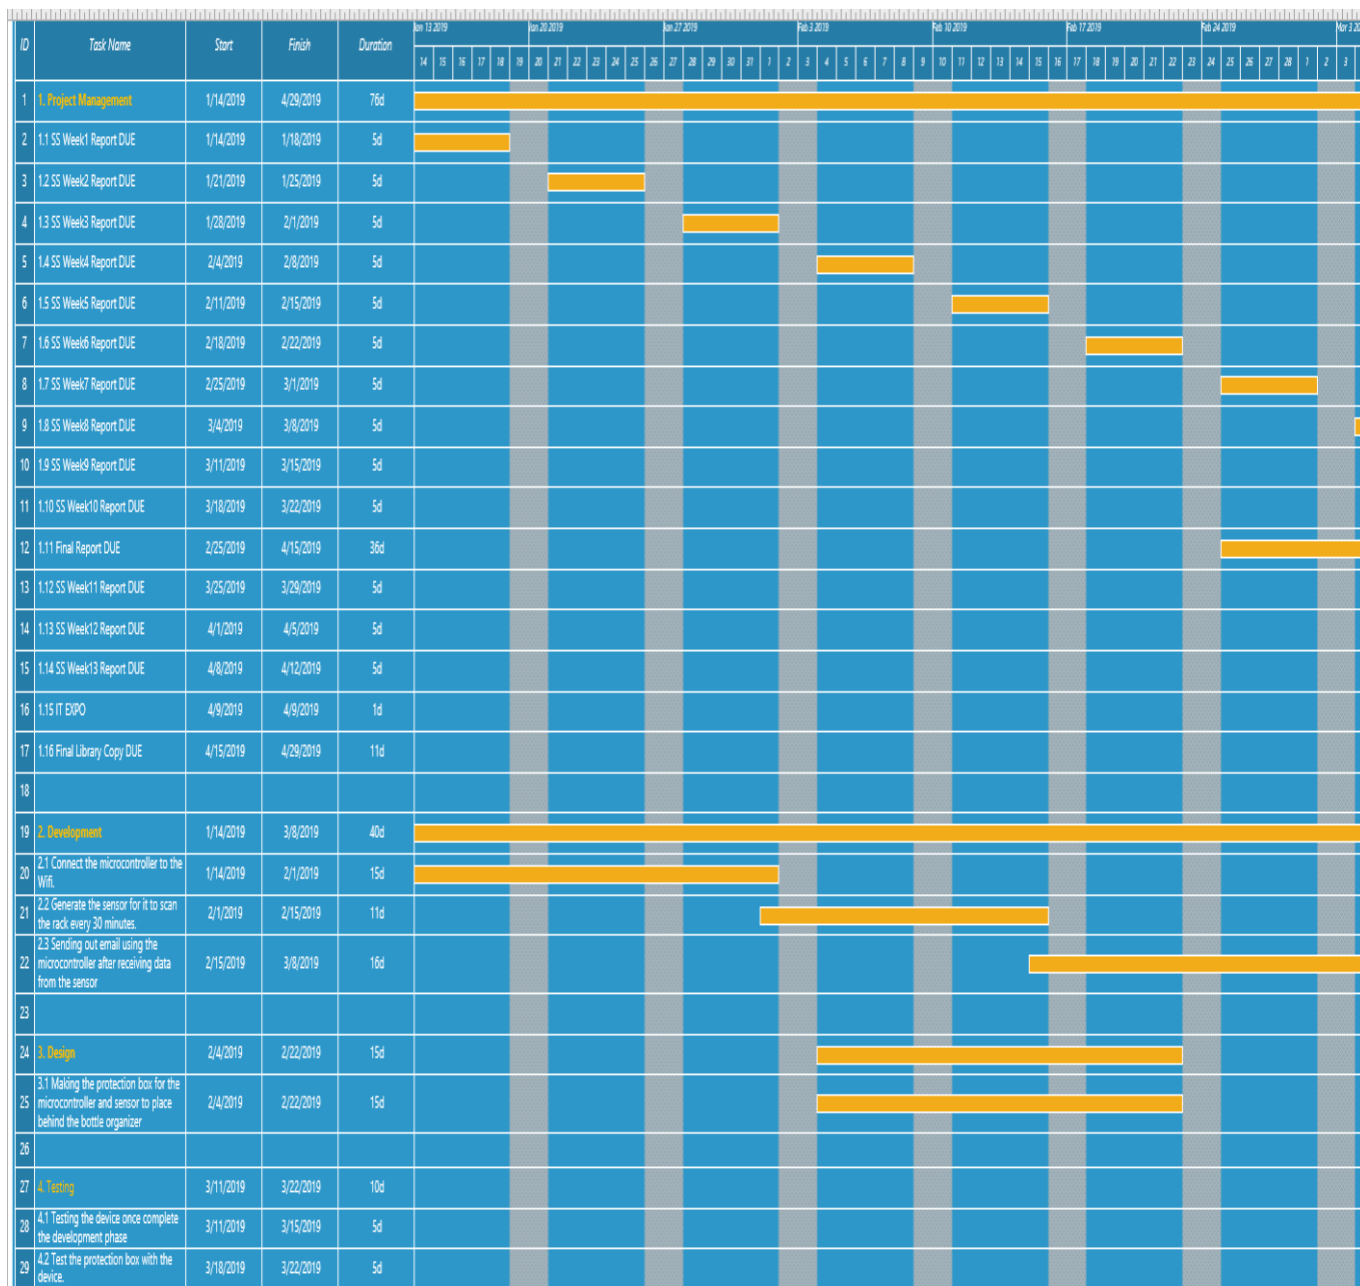

# TECHNICAL ELEMENT

## Application

Alarum is a combination of the Sparkfun ESP8266 Thing Dev microcontroller and the Adafruit VL53LOX proximity laser sensor that are used for our prototype. A set of codes will run to determine the distance of the last item on the bottle organizer from the Adafruit VL53LOX laser sensor. The laser sensor will be scanning and calculating the distance of the last item on the rack from the back of the rack, then it will send that data of the current distance with a prompt indicating the current status of the rack to the Sparkfun ESP8266 Thing Dev. If the rack is out of stock, the microcontroller will have a blinking LED indicating that the rack needs to be refilled and it will return to normal state when there are items back on the rack. Then, the ESP8266 Thing Dev microcontroller will take that data from the sensor and send notifications via emails to the party that is in charge of fulfilling the orders, approximately every 2 hours, and let them know to restock the beverage fridges when they are low.

## Programming

The coding language for Alarum is the Arduino language, while the logic control code will be developed using Arduino IDE for this prototype sensor. The logic control codes, (one for the microcontroller and one for the sensor) which are merely sets of C/C++ functions, will be called from the computer, then they will be uploaded to the sensor (Adafruit VL53LOX) and the microcontroller (Sparkfun ESP8266 Thing Dev). There are 3 parts that go into the code that is responsible for the functionality of Alarum: The Wifi connection part, the sensor reading part, and lastly the SMTP email server part that connects and sends emails.

The microcontroller will first need to reference the libraries of the ESP8266 and VL53LOX libraries. Then it will create some variables and enums for the functions in the code.

Next, the microcontroller will need to be connected with the Wifi using a function that requires authentication information from the administrator, like Wifi ssid and password, which were defined at the beginning.

The code for the sensor part contains one function to read and receive data of the current distance from the sensor with the closest item to it. In that function, there is a “checking loop” that has some “if else” conditions that check the current distance and compare them with some “const unsigned int” that was predefined from above. It will create some status prompts according to the current distance of the rack to the closet detected item using the data that it got from the above (For example, “High on stock,” “Medium on stock,” “Low on stock,” or “Out of stock”). After that, each status from the “checking loop” will be assigned with their according enum numbers which will only be recorded by the current distance in the specific time that it’s being read. These “enums” will then be stored and used with the sending email code.

For sending emails, a function will ask for username and password for authorization to connect to the SMTP Server from the administrator. Then, there is another function that requires the administrator to put in the information of the sender and recipient email addresses. After that, a loop function will be calling those enums from the sensor’s function and checking them with “if else” conditions to make sure that it is receiving the correct data from the sensor before using the data from the enums to send emails to the recipient email address with a prompt indicating what is the current status of the bottle organizer.

## **SMTP Service**

Alarum is using a free SMTP Service for the notification alert emails, specifically, SMTP2GO is being used for this project. Alarum has a free account on STMP2GO.com and the

account is able to record all the emails that has been sent, it also has all the information of the sender email addresses as well as recipient email addresses.

## **Security**

Alarum uses a 3D printed container box only for the proximity sensor, but a bigger container box could be made to be able to contain the whole device, including all the wires and microcontroller. This box will have a physical lock to make sure that no one would have access to it without the key to increase the security of the whole device.

With SMTP2GO, Alarum needs to provide username and password to log in to the server and they need to be in base64, ASCII encoded format. Alarum is also able to track all the emails that have been sent via the SMTP2GO Service, with the information of what email is sent to and from which email address, as well as an “Email Activity” report stating the specific time of when each email was sent. The report could even be exported from SMTP2GO in case we need to take a look at them.

# TESTING

## Overview

This portion of the report will be operating as a guidebook to give more details on the testing phase of the Alarum project. All team members will be working on testing together to ensure the final prototype is functioning. The individuals that need to use this section are:

- Project Manager
- Developer
- Team Member

## Scope

The testing scope is to verify that Alarum project is operating properly, which means that the microcontroller is sending out email notifications with the data information that it is receiving from the sensor to users' emails. The test will be following procedures that are required to install and set up the Adafruit VL53LOX sensor, the SparkFun ESP8266 Thing Dev microcontroller, and SMTP Service from SMTP2GO.

## Objective

The objective of testing for Alarum will be clarifying if it has all the proper codes that are needed for the ESP8266 to connect to the wifi and SMTP server. It will also receive data from the sensor and then send that data via email to the users. Information that will be provided in this part is mainly testing information on three main categories, which are: ensuring the SparkFun ESP8266 microcontroller is connected to the Wifi/Hotspot, the functionality of the Adafruit VL53LOX sensor, and sending email notifications to the user with the collected data from the sensor.

## Entry and Exit Criteria

Entry Criteria:

- Developing the code for the ultrasonic proximity sensor
- Developing the code for Wifi and SMTP Server Connection

- Developing the code for sending emails using the data from the sensor
- Testing environment setting up

Exit Criteria:

- All tests are run properly
- Errors and documented are patches

## **Logging Test and Reporting**

After each test, the developer will document the test and describe the outcome of each test. If the test fails, the developers will fix the issue. If there is an error found in the project, the developers will also document the error or issues in the testing reports in the appendix section.

## **System Testing**

The complete system testing for Alarum project will be included the time of flight sensor and distance measuring working effectively. That way if any errors or failures appear during the test, it can be taking care of right away. The final product will be a complete microcontroller/sensor prototype that can measure distance between cans/bottles in the rack and sending out notifications via emails.

## **Testing Procedures**

Below are tests that we will perform:

1. Stability Test - This test is focused on setting up the environment for the prototype using the Adafruit VL53L0X and the ESP8266 microcontroller onto the breadboard.
2. Launch Test - This test is focused on using the sensor to measure the distance from the end of the rack to the last bottle.
3. Functionality Test - This test will be focused on sending out email notifications by using the microcontroller that connect to the Wifi and send out notifications to users' emails (via platform like iPhone, Android and Laptops).

## Pass/Fails Conditions

All tests that will be conducting mostly expected to be pass. If there is any errors or fails during the testing phase, developers will records and documents the problems and resolve them.

## Schedule of Team Member Testing

Following is the Team Member Testing schedule table

Team Member	Timeline to be Completed	When
Developer	10/16/2018 - 04/14/2019	Weekly

**Table 2: Team Member Testing**


## Schedule of Round Table Testing

Below is the round table testing schedule for the project.

Round Table	TimeLine	Time
Participants	02/11/2019 - 04/15/2019	Once per 1 weeks (4 times)
Volunteers	02/11/2019 - 04/15/2019	Once per 1 weeks (4 times)

**Table 3: Round Table Testing**

# IT EXPO



**alarum**


College of Education, Criminal Justice & Human Services  
 School of Information Technology  
 University of Cincinnati

Team 34 - Brandon Nwankwo, Hoa Nguyen, Hien Nguyen  
 Faculty Advisor - Tyler Hopperton


Alarum uses the ESP8266 Thing microcontroller and VL53L0X proximity sensor for hardware. Arduino is used as the programming language, and SMTP2GO for sending alert emails.

**Hardware**

*Microcontroller*



*Proximity Sensor*




**Software**


*Arduino IDE*




*SMTP Service*



**Sponsors**




University of  
**CINCINNATI**  
CENTER FOR SIMULATIONS AND  
 VIRTUAL ENVIRONMENTS RESEARCH



**Khamisa**  
3D Prosthetics

**Problem:** What if supermarkets and convenience stores have a device that could alert the store when to restock their fridges as soon as they are about to run out of stock?

**Solution:** An Internet of Things device that notifies supermarkets and convenience stores when they have to restock their cans/bottles in their beverage fridges. This project will be a solution to an inventory management problem of the food retail industry.



University of  
**CINCINNATI**

**Figure 6: Alarum - IT Expo Poster**

# CONCLUSION

## **FALL 2018 - August to December 2018**

Alarum has accomplished its objectives of Fall semester 2018 of purchasing and wiring up all of the hardware parts; having the sensor able to run and read the distance of a nearby object with the prototype bottle organizer; as well as having all the paperwork finished by the beginning of December before Winter break.

## **SPRING 2019 - January to April 2019**

The goals for Spring semester will be to focus on enhancing the code for the sensor and to have the sensor be able to send emails through the microcontroller. Also, creating a protection box for the prototype, as well as finding a solution to stabilize the sensor at the back of the rack.

## **FUTURE RECOMMENDATION**

Alarum is potentially looking into using a more secure microcontroller in the future if the project becomes commercialized. We could also look for a better solution to item detection, such as using a sensor distance camera instead of a proximity sensor, so it could actually see the current state of the bottle organizer.

A new paid Sender Domain will be utilized instead of the current free SMTP2GO Service. With the paid SMTP Sender Domain, all emails will be properly authenticated with DKIM and SPF, which means they won't show as being sent 'via smtp2go.com' in Gmail. Alarum will also look into adding Webhooks and API Keys for more control over the traffic of the sent emails and be able to implement more security procedures on the server.

## WORK CITED

### Hardware:

Adafruit. "Adafruit VL53L0X Time of Flight Distance Sensor - ~30 to 1000mm". <https://www.adafruit.com/product/3317>. n.d.

SparkFun Electronics. "SparkFun ESP8266 Thing - Dev Board (with Headers)". <https://www.sparkfun.com/products/13804>. n.d.

### Software:

ada. lady. "Arduino Code". <https://learn.adafruit.com/adafruit-vl53l0x-micro-lidar-distance-sensor-breakout/arduino-code>. n.d.

JIMBLOM. "ESP8266 Thing Hookup Guide". <https://learn.sparkfun.com/tutorials/esp8266-thing-hookup-guide/installing-the-esp8266-arduino-addon>. n.d.

E. "Sending mail with an ESP8266". <https://arduino diy.wordpress.com/2016/12/28/sending-mail-with-an-esp8266/>. December 28, 2016.

### 3D Printed Model:

NotLikeALeafOnTheWind. "8020 mount VL6180x Adafruit Time of Flight Distance Sensor 90 deg". <https://www.thingiverse.com/thing:3367437>. January 20, 2019.

### Articles:

Rittenhouse. Lindsay. "Walmart's Haunting Empty Shelf Problem Returns to Wreak Havoc on Sales". <https://www.thestreet.com/story/14223273/1/walmart-may-have-a-growing-out-of-stock-problem-giving-us-terrifying-flashbacks-to-2013.html>. July 13, 2017.

Anderson. George. "Does Walmart Have Restocking Problems?". <https://www.retailwire.com/discussion/does-walmart-have-restocking-problems/>. March 01, 2013.

Rosenblum. Paula. "Walmart's Out of Stock Problem: Only Half the Story?". <https://www.forbes.com/sites/paularosenblum/2014/04/15/walmarts-out-of-stock-problem-only-half-the-story/#3659e4487369>. April 15, 2014.

# APPENDIX

## Testing Reports

**Stability Test** - This test is focused on setting up the environment for the prototype using the Adafruit VL53L0X and the ESP8266 microcontroller.

Tester	Date	Item #	Expected	Actual	Pass/Fail	Error
Developer	10/20/18	1.1	Wire up the VL53L0X sensor and the ESP8266 microcontroller together with a breadboard	Attachment stabilized with the breadboard and wires	Pass	
Developer	11/05/18	1.2	Connect the device to the computer via micro USB cable	Connection established with the computer	Pass	
Developer	12/15/19	1.3	Placing the sensor at the back of the rack to read distance	Receiving inconsistent data from the sensor	Fail	Receive inconsistent outcome data
Developer	02/15/19	1.4	Tape the sensor to the back of the rack to dictate its scanning direction	Not much improvement as the sensor still not completely stable	Fail	Still receive inconsistent outcome data
Developer	03/07/19	1.5	Using a 3D printed container box for the sensor and place it at the back of the rack	The device was able to detect the correct distance of the closet item on the rack from the sensor	Pass	

**Table 4: Stability Test**

**Launch Test** - This test is focused on using the sensor to measure the distance from the end of the rack to the last bottle.

Tester	Date	Item #	Expected	Actual	Pass/Fail	Error
Developer	11/15/18	1.1	Testing the sensor by connecting it with the microcontroller to see if it is functioning.	The sensor works fine with the microcontroller after powered on.	Pass	
Developer	12/03/18	1.2	Use example code from the Adafruit_VL53L0X library to test if the sensor is able to read and send data.	The sensor was able to measure the distance of the cans from the back of the rack.	Pass	
Developer	01/12/19	1.3	Code Developing #1 - Alter the example code to make it fit with Alarum Project's goals.	Wasn't able to compile and upload the code changes.	Fail	There are some errors within the new codes
Developer	02/02/19	1.4	Code Developing #2 - Fix the errors of the code and create some loop to check on current status of the stack.	Being able to compile and upload the new code with some changes to its.	Pass	
Developer	02/18/19	1.5	Code Developing #3 - Improve the current "loop code" using multiple void functions.	The device is able to send prompt of current status from the sensor's data	Pass	
Developer	03/08/19	1.6	Code Developing #4 - Final improve on the "loop code" using if else conditions and combine everything in one function	The code is a lot cleaner and work better with the email sending now.	Pass	

**Table 5: Launch Test**

**Functionality Test** - This test will be focused on sending out email notifications by using the microcontroller that connect to the Wifi and send out notifications to users' email (via platforms like iPhone, Android and Laptops).

Tester	Date	Item #	Expected	Actual	Pass/Fail	Error
Developer	02/8/19	1.1	Microcontroller to join the Wifi network using the Wifi example code.	Does not join the Wifi network using the example code.	Fail	The Wifi was the 5.0 GHz, and it can only use the 2.4 GHz one
Developer	02/13/19	1.2	Microcontroller able to join Wifi network after switching it to 2.4 GHz network	Microcontroller is able to joins the Wifi Network.	Pass	
Developer	02/20/19	1.3	Create a SMTP2GO account for Alarum Project and try to connect it with the microcontroller	Microcontroller is able to connect with the SMTP Server.	Pass	
Developer	02/24/19	1.4	Try to send a test email to a recipient email address using SMTP2GO Service.	Couldn't send email due to the account is blocked by SMTP2GO.	Fail	"Error: 550 that SMTP username's account is not allowed to send"
Developer	02/26/19	1.5	Contact SMTP2GO and ask them to remove the restriction as Alarum is just a school project.	Accepted - Alarum is able to send emails to the recipient via SMTP2GO.	Pass	
Developer	03/08/19	1.6	Send emails with the data of the current status that is receiving from the sensor	Successfully deployed.	Pass	

**Table 6: Functionality Test**